

1

2

3


4

5

COMPONENT SPECIFICATION

USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.

SPECIFICATIONS

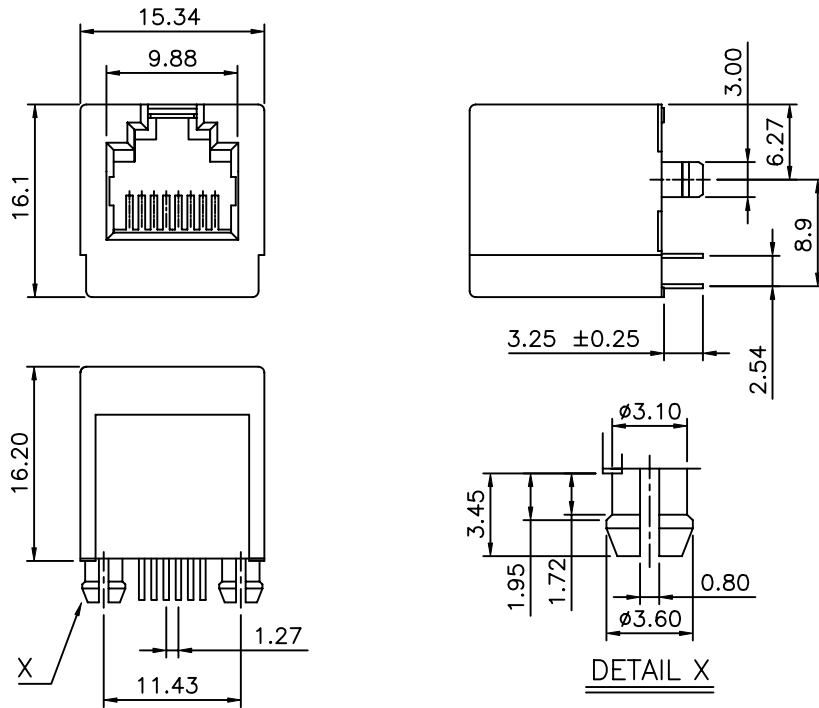

ELECTRICAL

CONTACT RATING: 1.5A AT 125 VAC
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 500 MEGOHMS MIN. AT 500 VDC
 DIELECTRIC STRENGTH: 1000 VRMS FOR 1 MINUTE

MECHANICAL

LIFE: 750 CYCLES MIN.



ENVIRONMENTAL

OPERATING TEMPERATURE: 0°C TO 70°C
 STORAGE TEMPERATURE: -40°C TO +85°C

MATERIAL

HOUSING: GLASS FILLED PBT, UL94V-0
 TERMINALS: 0.35mm THICK PHOSPHOR BRONZE
 PLATING: CONTACT AREA - SELECTIVE GOLD OVER NICKEL
 TERMINATION AREA - GOLD FLASH OVER NICKEL
 CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

PART NUMBER BUILDER:

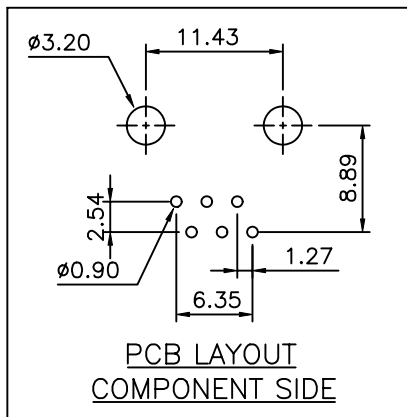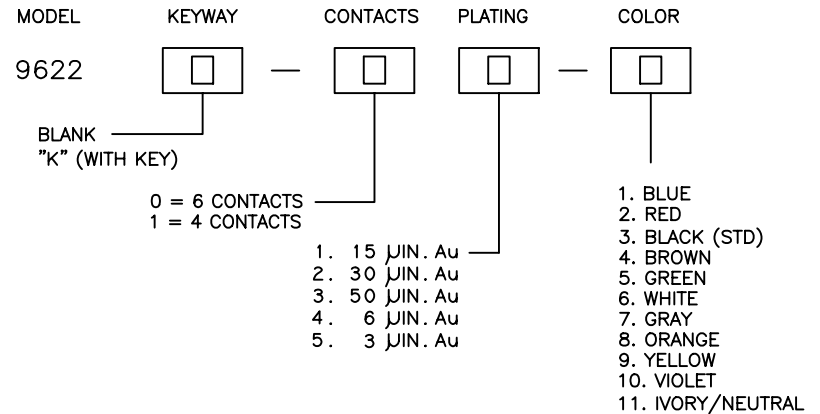

RoHS COMPLIANT



SENIOR INDUSTRIES, INC.

DESIGNED:			SYM.	DATE:	DESCRIPTION OF REVISIONS:	DRAWN:	APPD:	TOLERANCE:	PART NO:	9622-XX-X
DRAWN:	GAT	08/22/06	▲	08.22.06	NEW	GAT	JF	TO 1 DECIMAL PLACE: ±.25	TITLE:	MODULAR JACK
CHECKED:	GAT	08/22/06	▲	.	.			TO 2 DECIMAL PLACES: ±.13	SHEET:	1 OF 1
APPROVED:	JF	08/23/06	▲	.	.			AS ANGLES: ±1/2°		
3RD ANGLE		UNIT:	mm	SCALE:	1:1	REV:	A			