

1	2	3	4	5
COMPONENT SPECIFICATION	USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.			

SPECIFICATIONS

ELECTRICAL:

CONTACT RATING: 1.5A AT 125 VAC
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 500 MEGOHMS MIN. AT 500 VDC
 DIELECTRIC STRENGTH: 1000 VRMS FOR 1 MINUTE

MECHANICAL:

LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

OPERATING TEMPERATURE: 0°C TO 70°C
 STORAGE TEMPERATURE: -40°C TO +85°C





MATERIAL:

HOUSING: GLASS FILLED POLYESTER, UL94V-0
 TERMINALS: PHOSPHOR BRONZE, 0.35t
 PLATING: CONTACT AREA - SELECTIVE GOLD PLATING OVER NICKEL OVER TIN
 TERMINATION AREA -100 μIN. TIN OVER NICKEL

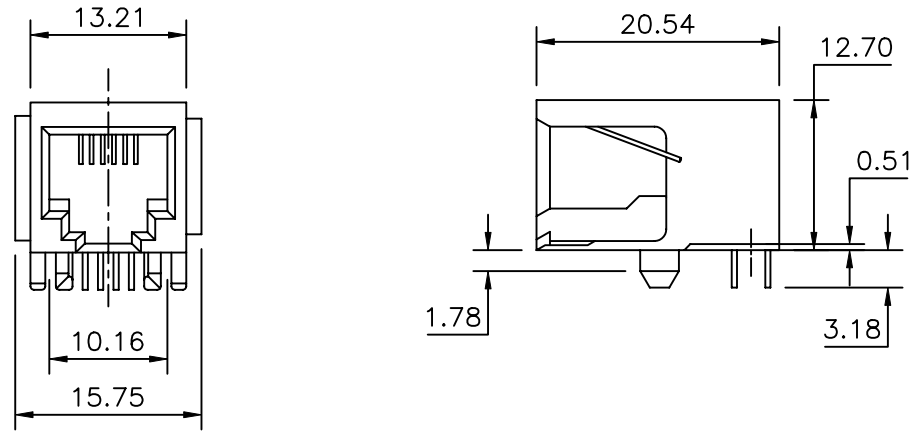
REGULATORY:

UL RECOGNIZED COMPONENT. UL FILE NO. E147880.

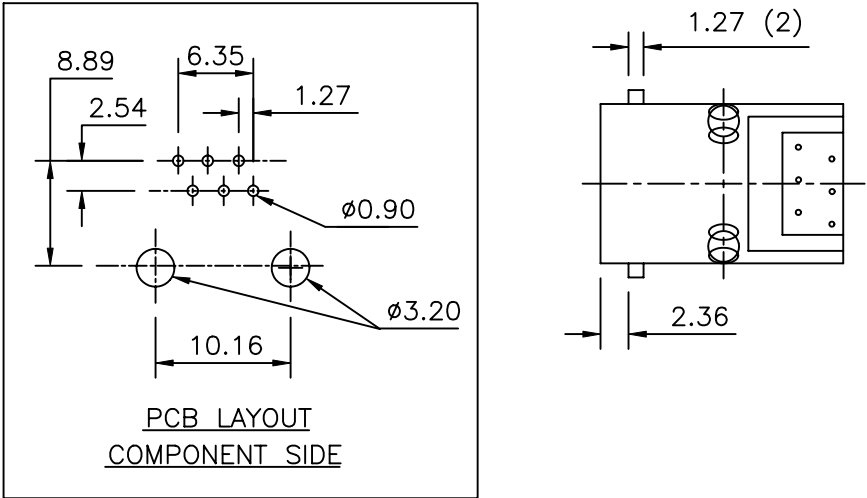
PART NUMBER BUILDER:

MODEL	KEYWAY	CONTACTS	PLATING	COLOR
9636				
BLANK "K" (WITH KEY)				
	0 = 6 CONTACTS 1 = 4 CONTACTS 2 = 2 CONTACTS		1. 15 μIN. Au 2. 30 μIN. Au 3. 50 μIN. Au 4. 6 μIN. Au 5. 3 μIN. Au	1. BLUE 2. RED 3. BLACK (STD) 4. BROWN 5. GREEN 6. WHITE 7. GRAY 8. ORANGE 9. YELLOW 10. VIOLET 11. IVORY/NEUTRAL

A




B



C



DESIGNED:			SYM.	DATE:	DESCRIPTION OF REVISIONS:	DRAWN:	APPD:	TOLERANCE:	PART NO:	9636-XX-X	
DRAWN:	RJT	02/07/01	▲	02.07.01	NEW	RB	JF				
CHECKED:	GAT	02/03/06	▲	07.20.05	New Index, PN Builder Corr'd, Comp Side Added	KO	JF	TO 1 DECIMAL PLACE: ±.3	TITLE:	MODULAR JACK	
APPROVED:	JF	02/03/06	▲					TO 2 DECIMAL PLACES: ±.15			
3RD ANGLE		UNIT:	mm	SCALE:	2:1	REV:	B	AS ANGLES:	±1/2°	SHEET:	1 OF 1