


1	2	3	4	5
COMPONENT SPECIFICATION		USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.		



SPECIFICATIONS

- ELECTRICAL:
CONTACT RATING: 1.5A AT 125 VAC
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 500 MEGOHMS MIN. AT 500 VDC
DIELECTRIC STRENGTH: 1000 VRMS FOR 1 MINUTE
- MECHANICAL:
LIFE: 750 CYCLES MIN.
- ENVIRONMENTAL:
OPERATING TEMPERATURE: 0°C TO 70°C
STORAGE TEMPERATURE: -40°C TO +85°C
- MATERIAL:
HOUSING: GLASS FILLED POLYESTER, UL94V-0
TERMINALS: PHOSPHOR BRONZE, 0.35t
PLATING: CONTACT AREA - SELECTIVE GOLD PLATING OVER NICKEL OVER TIN
TERMINATION AREA - 100 µIN TIN OVER NICKEL

PART NUMBER BUILDER:

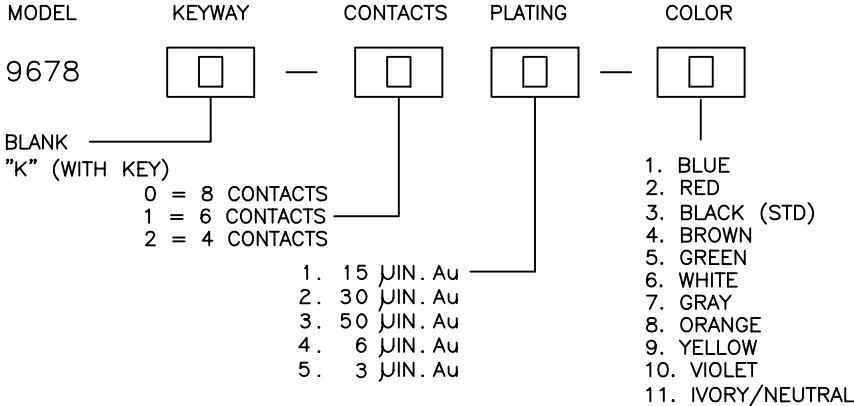

A
B
C

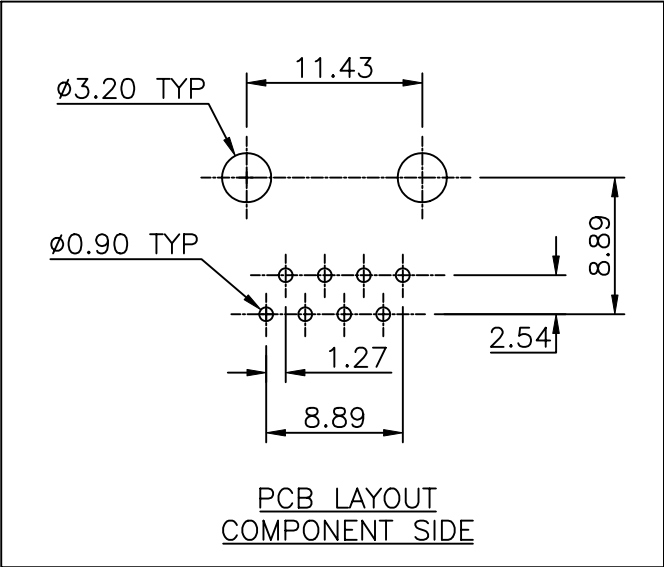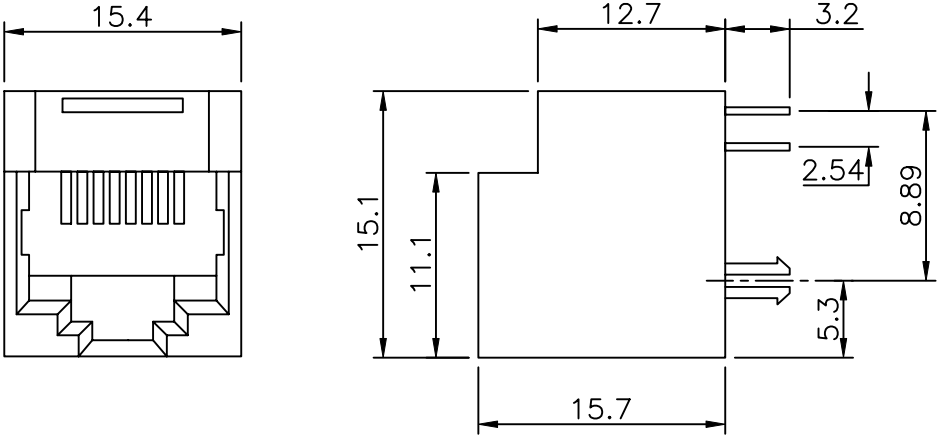

DESIGNED:			SYM.	DATE:	DESCRIPTION OF REVISIONS:	DRAWN:	APPD:	TOLERANCE:	PART NO:	9678-XX-X	
DRAWN:	RB	07/12/02		07.02.04	NEW	RB	JF				
CHECKED:	GAT	02/16/06		08.15.05	New Index, PN Builder Corrected, Lead rem'd	KO	JF	TO 1 DECIMAL PLACE: ±.3	TITLE:	MODULAR JACK	
APPROVED:	JF	02/16/06		.	.			TO 2 DECIMAL PLACES: ±.15			
3RD ANGLE		UNIT:	mm	SCALE:	2:1	REV:	B	AS ANGLES:	±1/2°	SHEET:	1 OF 1