

1	2	3	4	5
COMPONENT SPECIFICATION	USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.			

SPECIFICATIONS

**ELECTRICAL:**  
 CONTACT RATING: 1.5A AT 125 VAC  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.  
 INSULATION RESISTANCE: 500 MEGOHMS MIN. AT 500 VDC  
 DIELECTRIC STRENGTH: 1000 VRMS FOR 1 MINUTE





**MECHANICAL:**  
 LIFE: 750 CYCLES MIN.

**ENVIRONMENTAL:**  
 OPERATING TEMPERATURE: -40°C TO +70°C  
 STORAGE TEMPERATURE: -40°C TO +85°C

**MATERIAL:**  
 HOUSING: GLASS FILLED POLYESTER, UL94V-0, BLACK  
 TERMINALS: PHOSPHOR BRONZE  
 PLATING: GOLD OVER NICKEL

**REGULATORY:**  
 MEETS REQUIREMENTS OF FCC RULES AND REGULATIONS PART 68, SUBPART F.

**PART NUMBER BUILDER:**

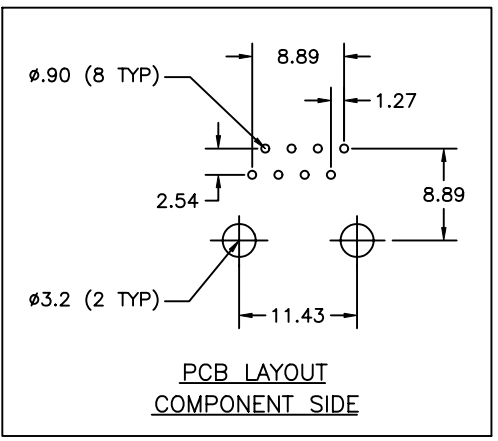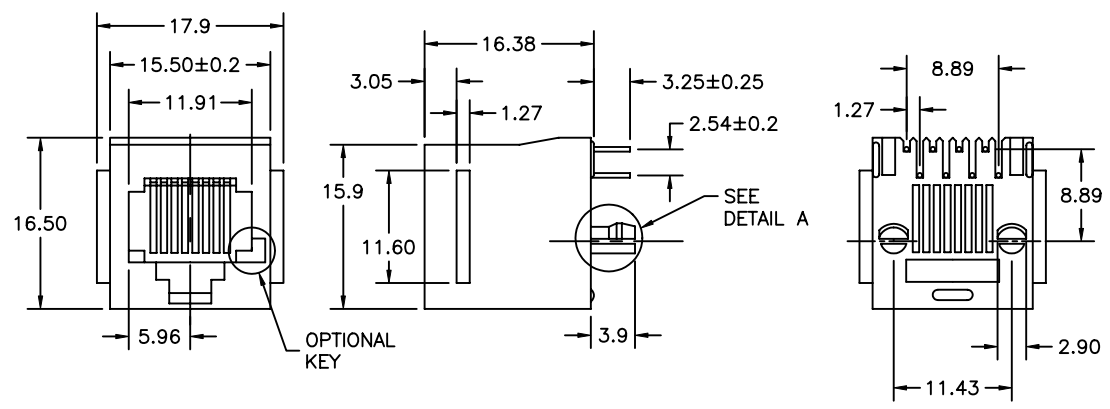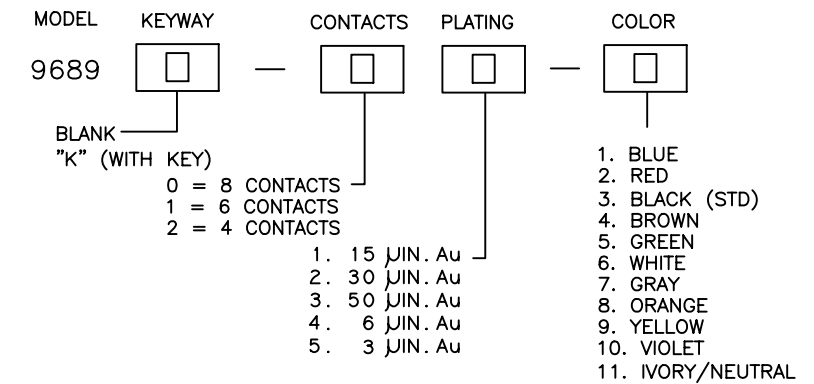

DESIGNED:			SYM.	DATE:	DESCRIPTION OF REVISIONS:	DRAWN:	APPD:	TOLERANCE:	PART NO:	9689-XX-X
DRAWN:	GAT	02/20/06	▲	02.20.06	NEW	GAT	JF	TO 1 DECIMAL PLACE: ±.25 TO 2 DECIMAL PLACES: ±.13	TITLE:	MODULAR JACK
CHECKED:	GAT	10/15/07	▲	10.15.07	Corrected part pegs from halves to full pegs	GAT	JF		SHEET:	1 OF 1
APPROVED:	JF	10/15/07	▲	10.29.10	Removed contact spec. Chg'd plating specs.	MAW	JF	AS ANGLES:		
3RD ANGLE		UNIT:	mm	SCALE:	2:1	REV:	C			