

COMPONENT SPECIFICATION

USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.

SPECIFICATIONS

ELECTRICAL:

CONTACT RATING: 1.5A AT 125 VAC
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 500 MEGOHMS MIN. AT 500 VDC
 DIELECTRIC STRENGTH: 500 VRMS FOR 1 MINUTE

MECHANICAL:

CRIMP TENSILE STRENGTH: 2.3 Kg MIN.



MATERIAL:

HOUSING: ABS UL94V-0
 CONTACT: 0.46mm PHOSPHOR BRONZE. GOLD OVER 100 µIN NICKEL
 SHORTING BARS: 0.46mm PHOSPHOR BRONZE. GOLD OVER 100 µIN NICKEL
 TERMINAL: 0.4mm BRASS, 100 µIN TIN
 WIRE STYLE: UL1061 AWM 80°C, VW-1.300V, 26 AWG
 PVC INSULATION. TOP COATED UL1061 WIRE.

REGULATORY:

UL RECOGNIZED COMPONENT. UL FILE NO. E147880.

PART NUMBER BUILDER:

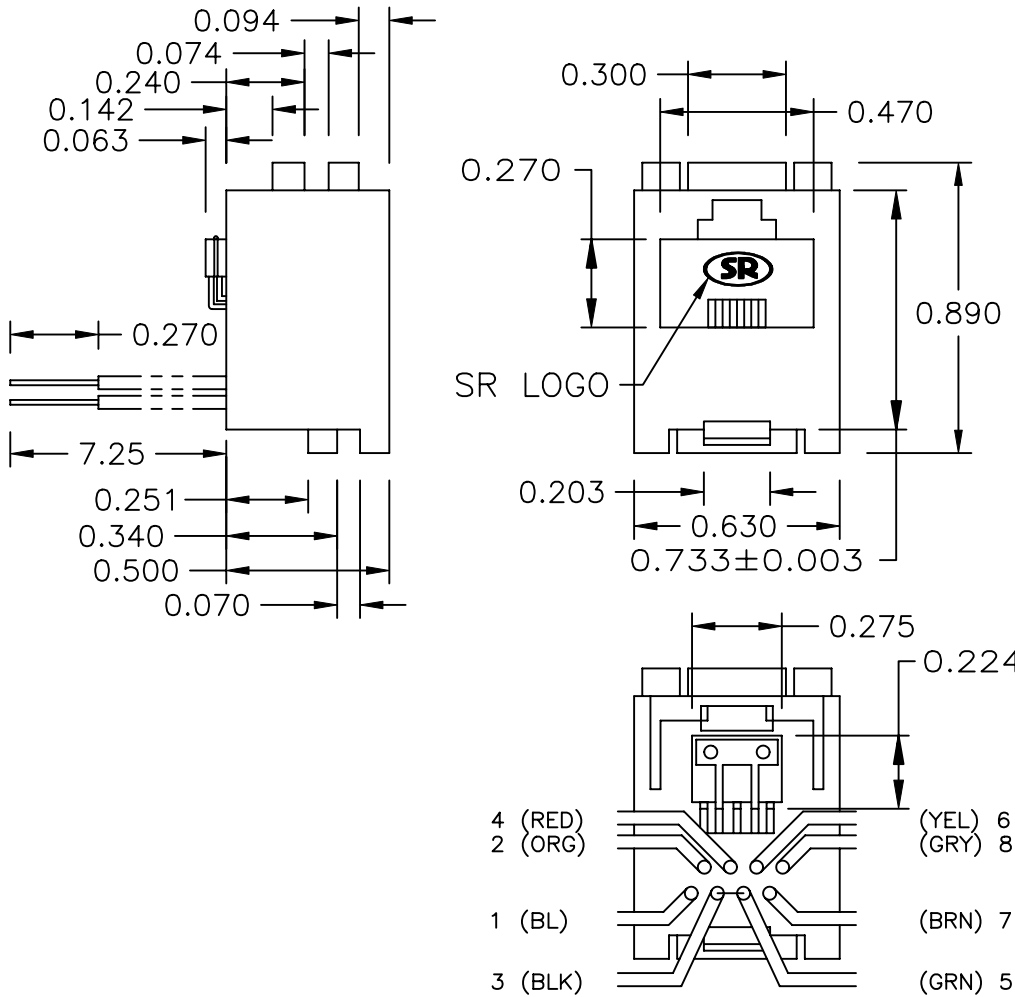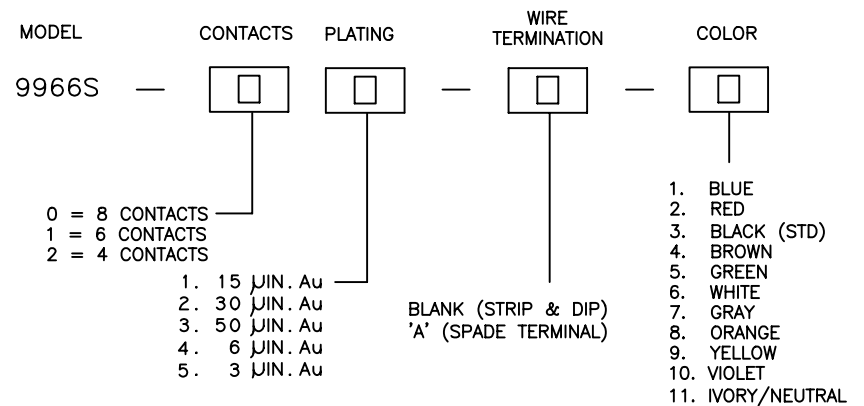

NOTES: 1. SHORTING PIN 1 TO PIN 4
 2. SHORTING PIN 2 TO PIN 5



DESIGNED:			SYM.	DATE:	DESCRIPTION OF REVISIONS:	DRAWN:	APPD:	TOLERANCE:	PART NO:	9966S-XX-X-X
DRAWN:	HV	12/12/97	△	08.26.98	Chg'd contact resist frm 30mΩ max-20mΩ max	TF	JF			
CHECKED:	GAT	02/28/06	△	01.21.99	Correct lead length dimensions	TF	JF	TO 2 DECIMAL PLACE: ±.015 TO 3 DECIMAL PLACES: ±.010	TITLE:	MODULAR JACK
APPROVED:	JF	02/28/06	△	02.12.99	Added Logo	TF	JF			
			△	03.27.00	Updated Specifications	RB	JF	AS ANGLES: ±1/2°	SHEET:	1 OF 1
			△	08.08.05	New Index, PN Builder Corr, Lead rem'd	KO	JF			
3RD ANGLE			UNIT:		IN	SCALE:		2:1	REV:	G