

1

2

3


4

5

COMPONENT SPECIFICATION

USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.

A

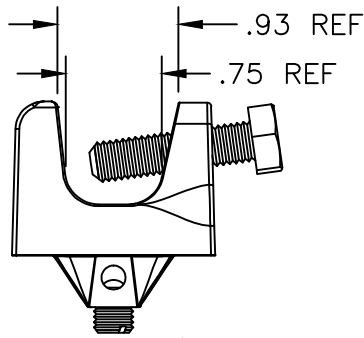

SPECIFICATIONS

MECHANICAL:

WIRE RANGE: #14-#6 COPPER GROUND WIRE
 STUD TORQUE: 120 IN-LBS MAX.
 SET SCREW TORQUE: 30 IN-LBS MAX.
 AGENCY APPROVAL: UL/CUL FILE NO. E137532

MATERIAL:

BODY: COPPER ALLOY
 STUD: STEEL, ZINC PLATED
 GROUND SCREW: STEEL, ZINC PLATED

B

BODY

1.175 REF.

C

1.56 REF.

.95 REF

GROUND SCREW



SENIOR INDUSTRIES, INC.

DESIGNED:			SYM.	DATE:	DESCRIPTION OF REVISIONS:	DRAWN:	APPD:	TOLERANCE:	PART NO:	SI-2181A
DRAWN:	MAW	04/05/12	▲	04.05.12	NEW	MAW	JF	TO 2 DECIMAL PLACES: ± TO 3 DECIMAL PLACES: ±	TITLE:	BEAM GROUND CLAMP
CHECKED:	MAW	04/05/12	▲	06.07.12	Corrected stud to stainless steel	MAW	JF			
APPROVED:	JF	04/05/12	▲	04.14.14	Returned stud to zinc plated steel	MAW	JF	AS ANGLES: ±	SHEET:	1 OF 1
			▲	03.30.17	Include torque rating	MAW	JF			
3RD ANGLE		UNIT:	inches	SCALE:	2:1	REV.	D			