

1

2

3


4

5

COMPONENT SPECIFICATION

USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.

ø.161 [ø4.10]
(2 PLCS)

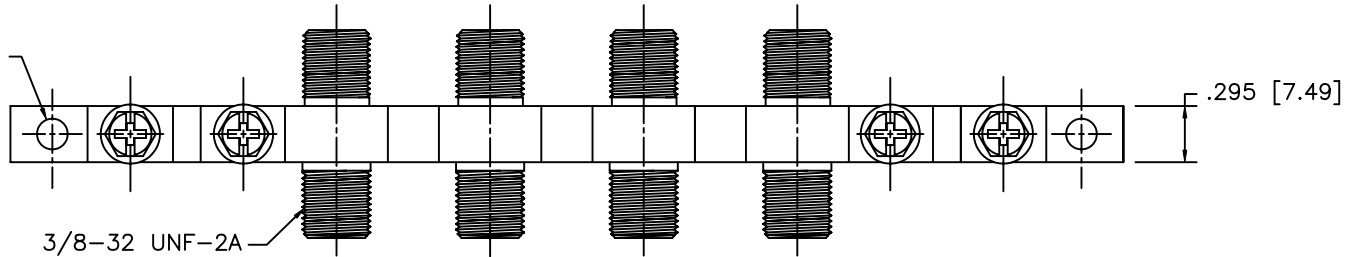

BUILT-IN F
CONNECTORS
TYP 4 PLCS

.807 [20.50] TYP

ø.177 [ø4.50] TYP


3/16-24 UNC-2B TYP

.660 [16.76] REF

.175 [4.45]

.264 [6.70]

INSTALLATION
SCREW



.728 [18.49]

.495 [12.57]

3.398 [86.30]

4.587 [116.50]

5.406 [137.30]

5.847 [148.50]

- NOTES: 1. MATERIAL:
 BODY: ZINC DIE CAST, NICKEL FINISH.
 SCREWS: STEEL, ZINC PLATED.
 2. GROUND BLOCK ASSY TO BE PACKED IN A PLASTIC BAG AND TO INCLUDE 2 INSTALLATION SCREWS.



DESIGNED:			SYM.	DATE:	DESCRIPTION OF REVISIONS:	DRAWN:	APPD:	TOLERANCE:	PART NO:	SI-GBZ-44	
DRAWN:	GAT	03/31/08	▲	03.31.09	NEW	GAT	JF				
CHECKED:	GAT	05/14/09	▲	04.03.09	Updated material	GAT	JF	TO 2 DECIMAL PLACE: ±	TITLE:	QUAD GROUND BLOCK	
APPROVED:	GAT	05/14/09	▲	05.14.09	Corr mater. on screws from SS to Steel, Zn pl.	GAT	JF	TO 3 DECIMAL PLACES: ±			
3RD ANGLE		UNIT:	IN	SCALE:	1:1	REV:	C	AS ANGLES:	±	SHEET:	1 OF 1