
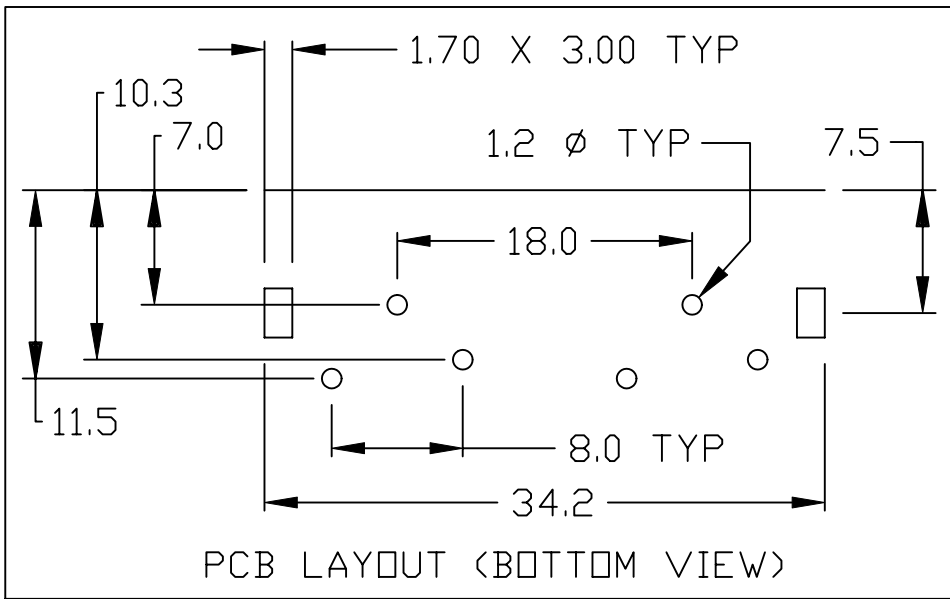


UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN METRIC.

TO 1 DECIMAL PLACE ±.3
 TO 2 DECIMAL PLACES ±.13
 AS ANGLES ±1/2°

ISSUE
 A

DATE
 04/03/97

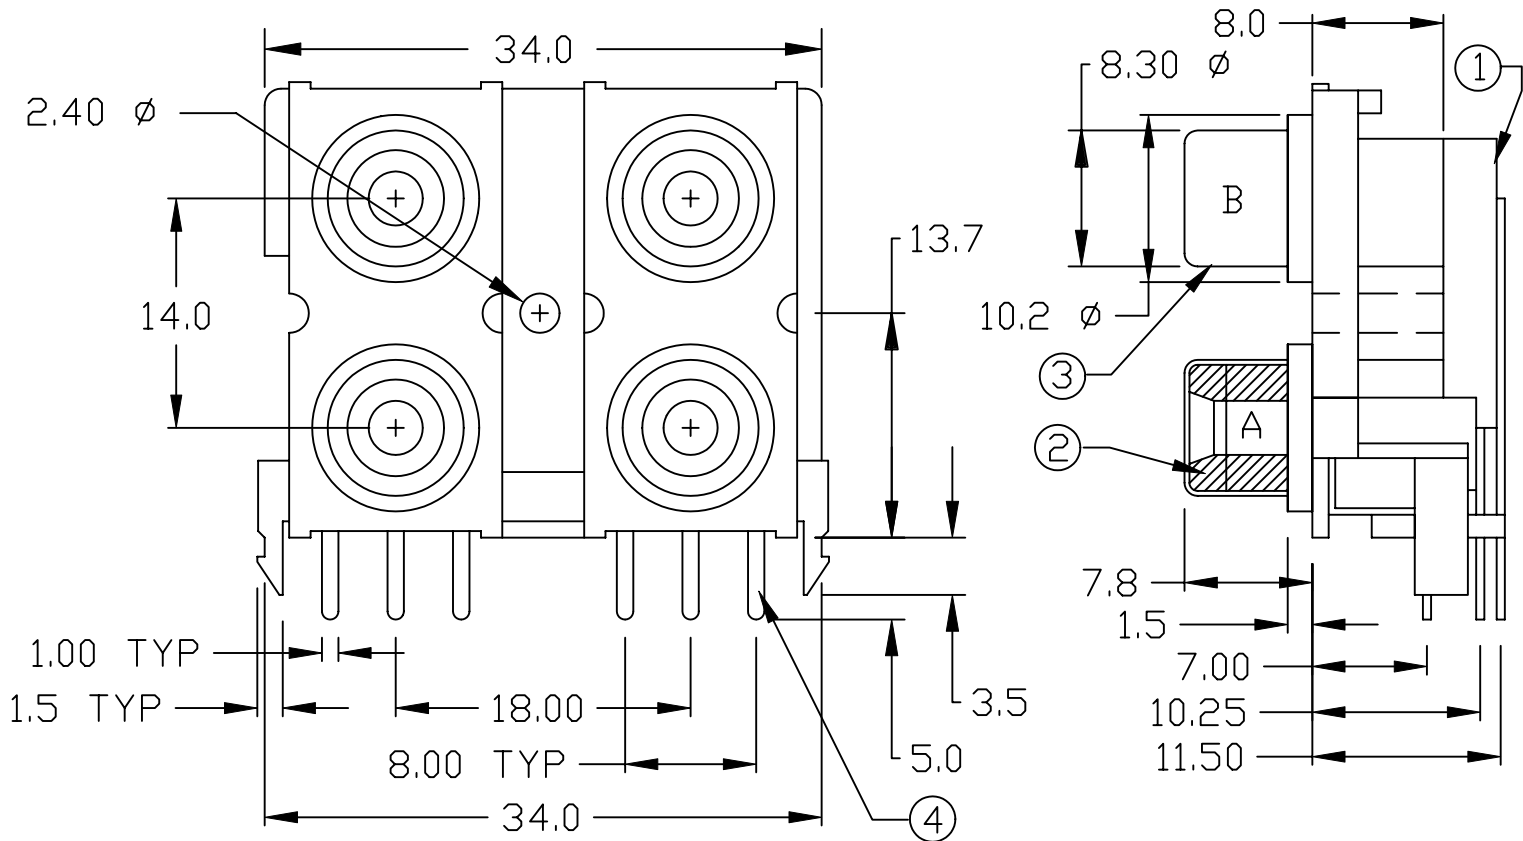

NOTE: FIRST 'X' DENOTES COLOR CODE FOR A
 SECOND 'X' DENOTES COLOR CODE FOR B

| ITEM | DESCRIPTION | MATERIAL/FINISH |
|------|-------------|-------------------------------------|
| 4 | TIP | BRASS 0.5MM THICK - TIN/LEAD PLATED |
| 3 | SLEEVE | BRASS 0.5MM THICK - NICKEL PLATED |
| 2 | INSULATOR | ABS, UL94HB |
| 1 | HOUSING | ABS, UL94HB |



| | | | |
|----------------------|--------------|----------------------|---------------|
| TITLE: PHONE JACK | | PART NO: SI-373XX | |
| DATE: 04/03/97 | DRAWN: HV | CHKD: | SCALE: 2/1 |
| | | SHEET: 1 OF 2 | |

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN METRIC.

TO 1 DECIMAL PLACE ±
TO 2 DECIMAL PLACES ±
AS ANGLES ±

ISSUE

DATE

A

04/03/97

SPECIFICATIONS

ELECTRICAL

CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 100 MEGOHMS MIN. AT 500 VDC
DIELECTRIC STRENGTH: 500 VAC FOR 60 SECONDS

MECHANICAL

INSERTION FORCE: 3.0 Kg MAX.
WITHDRAWAL FORCE: 0.8 - 3.0 Kg
LIFE: 5000 CYCLES



**SENIOR
INDUSTRIES, INC.**

TITLE:

PHONE JACK

PART NO:

SI-373XX

DATE:

04/03/97

DRAWN:

HV

CHKD:

SCALE:

SHEET:

2 OF 2