


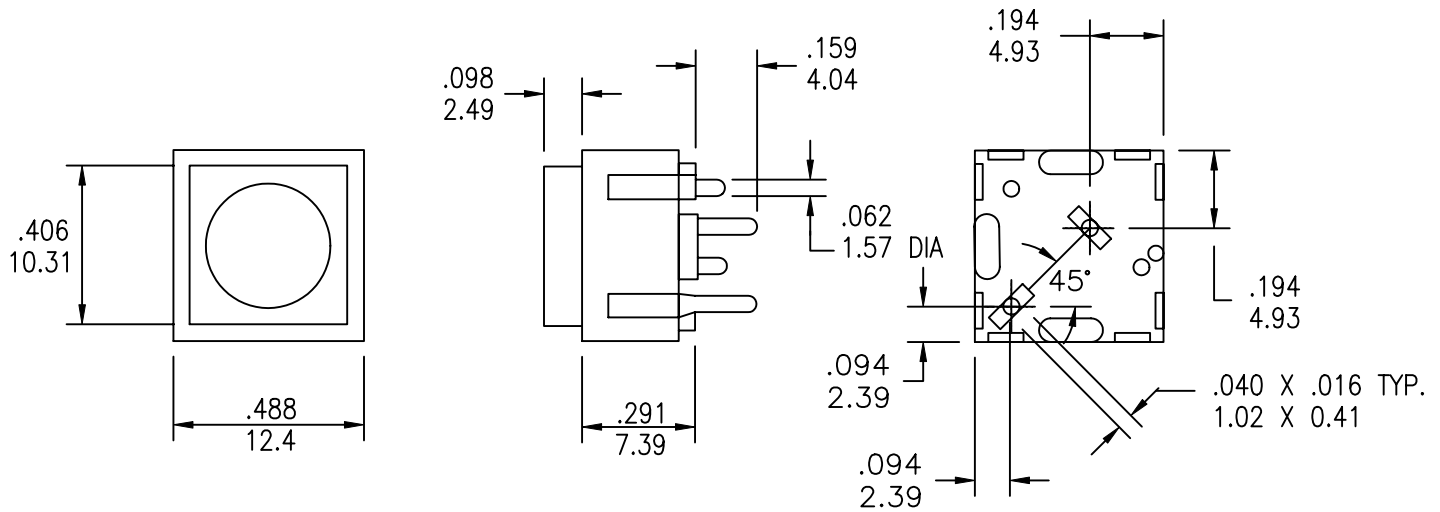

1

2


3





4

COMPONENT
SPECIFICATIONUSE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS
ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT
WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.


MODEL NO.	SWITCHING POSITION	
		
801	OFF	MOM
803	ON	MOM

NON-SHORTING TYPE

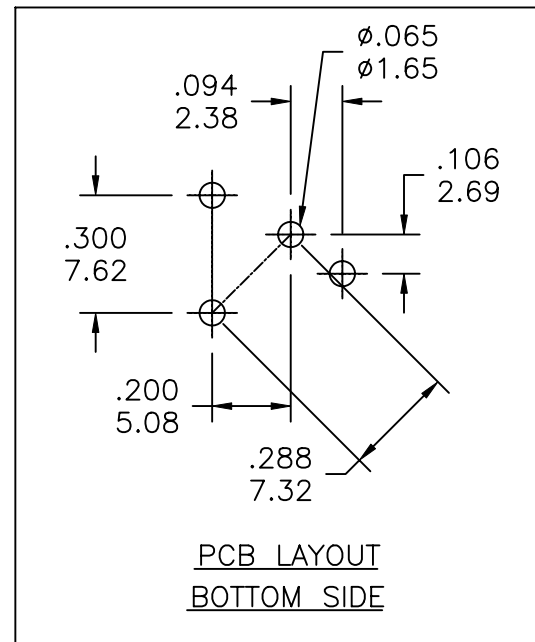

DESIGNED:			SYM.	DATE	DESCRIPTION OF REVISIONS	DRAWN	APPD.
				03.23.01	New	RB	JF
DRAWN:	RB	03/05/01		10.15.04	Shwd the corr pos of the lower pin. Corr dim .100 w/ .194	GAT	TF
CHECKED:	GAT	09/29/05		09.29.05	Schematic added. New Indicator	GAT	JF
APPROVED:	JF	10/10/05					

3RD ANGLE



UNIT:

IN[mm]

SCALE:

2:1

REV.

C

SENIOR
INDUSTRIES, INC.

TOLERANCE:

TO 1 DECIMAL PLACE: ± .2

TO 2 DECIMAL PLACES: ± .10

AS ANGLES: ±

SHEET:

PART NO:

SEE CHART

TITLE:

SRPK 801/803
PUSHBUTTON SWITCH

1 OF 2

1

2

3

4

COMPONENT SPECIFICATION

USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.

SPECIFICATIONS

ELECTRICAL

CONTACT RATING: 25 mA @ 50 VAC
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
INSULATION RESISTANCE: 100 MEGOHMS MIN @ 500 VDC
DIELECTRIC STRENGTH: 1,500 VRMS

MECHANICAL

LIFE: 50,000 CYCLES

ENVIRONMENTAL

OPERATING TEMPERATURE: -30°C TO +85°C

MATERIAL


HOUSING: GLASS FILLED NYLON
ACTUATOR: ABS OR POLYCARBONATE
DOME CONTACT: BERYLLIUM COPPER, SILVER PLATED
CONTACTS/TERMINALS: COPPER ALLOY, SILVER PLATED

PART NUMBER BUILDER:

SERIES	MODEL NO.	CAP COLOR
SRPK -	<input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	- <input type="text"/>
	801	1 - BLUE
	803	2 - RED
		3 - BLACK
		4 - BROWN
		5 - GREEN
		6 - WHITE
		7 - GRAY
		8 - ORANGE
		9 - YELLOW
		0 - VIOLET

DESIGNED:			SYM.	DATE	DESCRIPTION OF REVISIONS	DRAWN	APPD.
				03.23.01	New	RB	JF
DRAWN:	RB	03/05/01		10.15.04	Shwd the corr pos of the lower pin. Corr dim .100 w/ .194	GAT	TF
CHECKED:	GAT	09/29/05		09.29.05	Schematic added. New Indicator	GAT	JF
APPROVED:	JF	10/10/05					

3RD ANGLE



UNIT:

IN[mm]

SCALE:

2:1

REV.

C



SENIOR INDUSTRIES, INC.

TOLERANCE:

TO 1 DECIMAL PLACE:	±
TO 2 DECIMAL PLACES:	±
AS ANGLES:	±

SHEET:

PART NO:

SEE CHART

TITLE:

SRPK 801/803
PUSHBUTTON SWITCH

2 OF 2