
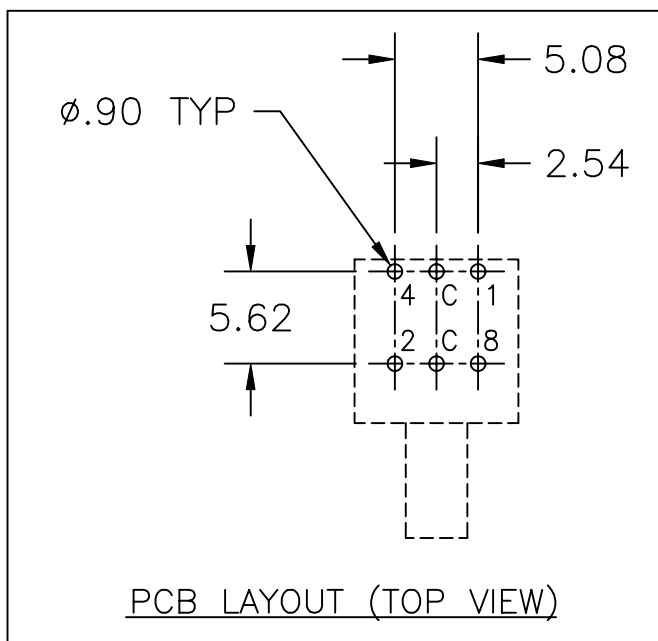


UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN METRIC.

TO 1 DECIMAL PLACE ±.3
 TO 2 DECIMAL PLACES ±0.15
 AS ANGLES ±1/2°

ISSUE
 A

DATE
 05/08/01

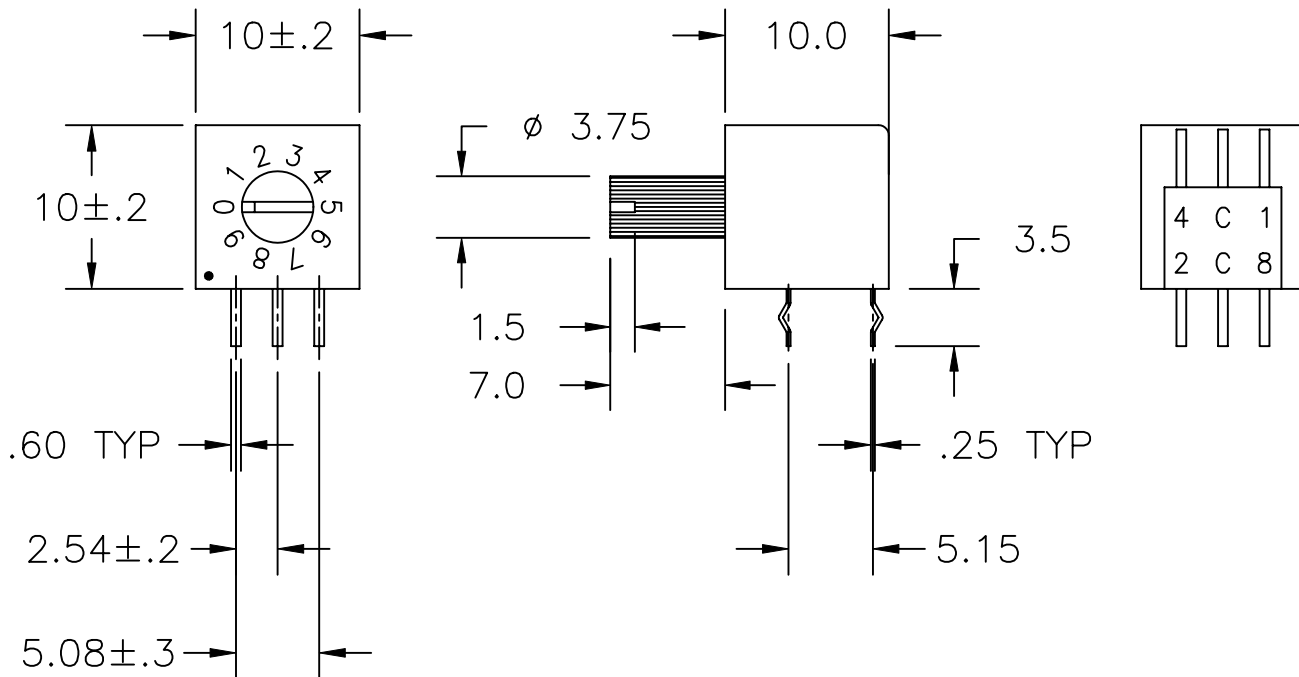

NOTE: 'X' IN PART NUMBER DENOTES CODE.
 R = REAL C = COMPLEMENTARY



TITLE: ROTARY DIP SWITCH

PART NO: SRRDR2S10RX

DATE: 05/08/01

DRAWN: RB

CHKD:

SCALE: 2/1

SHEET: 1 OF 2

SPECIFICATIONS

ELECTRICAL

CONTACT RATING: 25mA AT 24 VDC
 CONTACT RESISTANCE: 100 MILLIOHMS MAX.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN. AT 100 VDC
 DIELECTRIC STRENGTH: 250 VAC MIN FOR 1 MINUTE

MECHANICAL

LIFE: 2000 CYCLES MIN. PER POSITION

ENVIRONMENTAL

OPERATING TEMPERATURE: -25°C TO 70°C
 STORAGE TEMPERATURE: -40°C TO +85°C

MATERIAL

HOUSING: UL94V-0
 TERMINALS: PHOSPHOR BRONZE
 CONTACT: GOLD PLATED

REAL

POSITION	CONTACTED ○ COMMON C				
	1	2	4	8	C
0					○
1	○				○
2		○			○
3	○	○			○
4			○		○
5	○		○		○
6		○	○		○
7	○	○	○		○
8				○	○
9	○			○	○

COMPLEMENT

POSITION	CONTACTED ○ COMMON C				
	1	2	4	8	C
0	○	○	○	○	○
1		○	○	○	○
2	○		○	○	○
3			○	○	○
4	○	○		○	○
5		○		○	○
6	○			○	○
7				○	○
8	○	○	○		○
9		○	○		○