

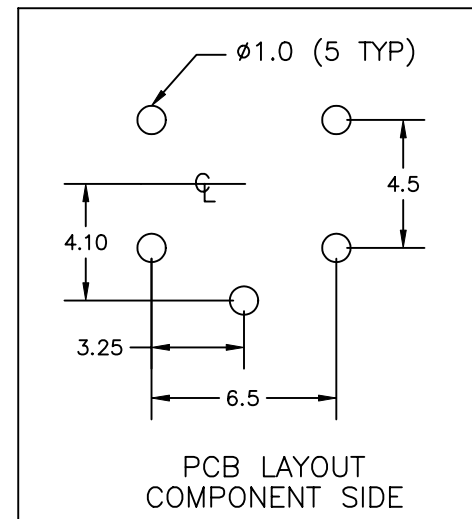
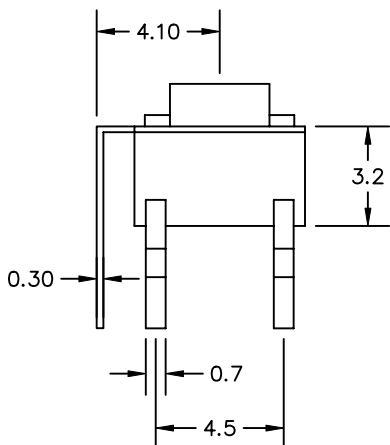
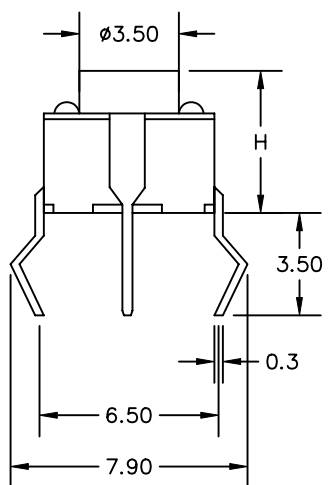


COMPONENT SPECIFICATION

USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.

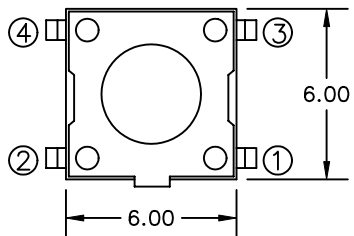

FIRST 'X' IN PART NUMBER DENOTES OPERATING FORCE.

'A' = 120 ±30 gf      'B' = 160 ±30gf  
'C' = 260 ±30gf      'D' = 100 ±30gf

SECOND 'X' IN PART NUMBER DENOTES ACTUATOR HEIGHT.

'A' - DIM 'H' = 4.3mm  
'B' - DIM 'H' = 5.0mm  
'C' - DIM 'H' = 9.5mm



**SENIOR INDUSTRIES, INC.**

DESIGNED:			SYM.	DATE:	DESCRIPTION OF REVISIONS:	DRAWN:	APPD:	TOLERANCE:	PART NO:	SRT-KRS-0613-XX
DRAWN:	RB	05/25/01	▲	05.25.01	NEW	RB		TO 1 DECIMAL PLACE: ± .3	TITLE:	TACT SWITCH
CHECKED:			▲	02.01.05	New Indicator. Note " 'C'-DIM 'H'=9.5mm" added.	GAT			TO 2 DECIMAL PLACES: ± .13	SHEET:
APPROVED:			▲					AS ANGLES: ±		
<b>3RD ANGLE</b>		UNIT:	mm	SCALE:	4:1	REV:	B			

1

2

3

4

5

COMPONENT SPECIFICATION

USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ANY ARTICLES SHOWN FOR ANY PURPOSE IS STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM SENIOR INDUSTRIES, INC.

SPECIFICATIONS

ELECTRICAL

CONTACT RATING: 50mA AT 12 VDC  
 CONTACT RESISTANCE: 100 MILLIOHMS MAX.  
 INSULATION RESISTANCE: 100 MEGOHMS MIN. AT 500 VDC  
 DIELECTRIC STRENGTH: 250 VAC FOR 1 MINUTE

MECHANICAL

OPERATING LIFE: 100,000 CYCLES MIN.  
 TRAVEL: 0.25 ±0.1

ENVIRONMENTAL

OPERATING TEMPERATURE: -20°C TO +70°C  
 STORAGE TEMPERATURE: -30°C TO +80°C

MATERIAL

HOUSING: NYLON 4/6 G30, UL94HB, BLACK  
 ACTUATOR: NYLON 4/6 G30, UL94HB, BLACK  
 TERMINALS: 0.3MM BRASS, SILVER PLATED  
 CONTACT: STAINLESS STEEL



**SENIOR INDUSTRIES, INC.**

DESIGNED:			SYM.	DATE:	DESCRIPTION OF REVISIONS:	DRAWN:	APPD:	TOLERANCE:	PART NO:	SRT-KRS-0613-XX	
DRAWN:	RB	05/25/01		05.25.01	NEW	RB					
CHECKED:				02.01.05	New Indicator. Note " 'C'-DIM 'H'=9.5mm" added.	GAT		TO 1 DECIMAL PLACE: ±	TITLE:	TACT SWITCH	
APPROVED:								TO 2 DECIMAL PLACES: ±			
<b>3RD ANGLE</b>			UNIT:	mm	SCALE:		REV:	B	AS ANGLES: ±	SHEET:	2 OF 2